


GEMINI SERIES

COMPARING TABLE

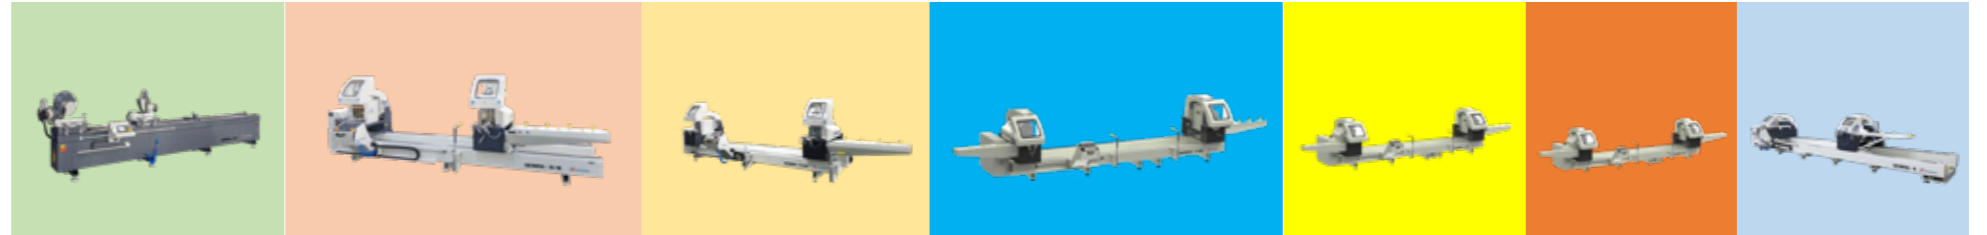

	GEMINI - II A	GEMINI - IV M	GEMINI - IV SA	GEMINI - V SA	GEMINI - V R	GEMINI - VI	GEMINI - X
Material (Alm / Pvc / Wood)	✓	✓	✓	✓	✓	✓	✓
Saw Diameter (mm)	Ø 400	Ø 450	Ø 450	Ø 550	Ø 550	Ø 600	Ø 550
Motor Power (kw)	2,2	2,2	2,2	3	3	3	3
Cutting Angle (°)	-45 / 45	90 / 45 (Internal Model) -45 / 90 (External Model)	90 / 45 (Internal Model) -45 / 90 (External Model)	90 / 45 (Internal Model) -22,5 / -45 / 90 (External Model)	-22,5 / 45	-22,5 / 45	90 / 30
X-Axis (Longitudinal) Movement	Automatic (Electronic Control)	Manual (Measurement Reading with Digital Display)	Automatic (Servo)	Automatic (Servo)	Automatic (Servo)	Automatic (Servo)	Automatic (Servo)
Angle Positioning	Manual	Hidropnömatik (90 / 45 veya -45 / 90 tek tuşla otomatik)	Hidropnömatik (90 / 45 veya -45 / 90 tek tuşla otomatik)	Hidropnömatik (90 / 45 veya -22,5 / -45 / 90 tek tuşla otomatik)	Automatic (Servo)	Automatic (Servo)	Automatic (Servo)
Positioning at Intermediate Angles	Manual	Manual	Manual	Manual	Automatic (Servo)	Automatic (Servo)	Automatic (Servo)
Min. with Double Head Cutting Size- 90/45 (mm)	610 / 610	560/560	400 / 560	480 / 720	480 / 720	480 / 720	460 / 460
Max. with Double Head Cutting Size - 90/45 (mm)	4550 / 4550	4040 / 4040	4040 / 4040	5050 / 5050	5050 / 5050	5050 / 5050	6000 / 6000
Optional Length Extension on X Axis	X	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
Saw Speed Adjustment	✓	✓	✓	✓	✓	✓	✓
Digital Adjustment of Saw Output Adjustment	X	X	Opt.	Opt.	✓	✓	✓
Profile Intermediate Support	Manual (1 ad.)	Automatic (1 ad.)	Automatic (2 ad.)	Automatic (2 ad.)	Automatic (2 ad.)	Automatic (2 ad.)	Automatic (3 ad.)
Conveyor - Moving Head	X	✓	✓	✓	✓	✓	✓
Conveyor - Fixed Head	X	Opt.	Opt.	Opt.	✓	✓	✓
Spray Saw Cooling System	✓	✓	✓	✓	✓	✓	✓
Barcode Printer	X	X	Opt.	Opt.	✓	✓	✓
Oz Machine Softcut (Cutting optimization program)	X	X	Opt.	Opt.	Opt.	Opt.	Opt.
Remote Network Connection, Ethernet and USB Data Transfer	X	✓	✓	✓	✓	✓	✓