

Features

Used for cutting processes of aluminum, plastic and wooden profiles.


- Hydro-Pneumatic cutting process
- · Secure cutting by the cover equipped with a safety sensor
- · Cutting speed adjustment based on the profile
- Cutting at any desired angle between -67.5° and +67.5° Cutting at -67,5°, -45°, -30°, -22,5°, -15°, 0°, 15°, 22,5°, 30°, 45°,67.5°
- Increase in cutting capacity with mobile miter • Pneumatic vertical and horizontal clamps

Standard Equipments


- Ø 420 saw blade
- · Conveyor (right)
- Cooling system
- · Compatibility with powder suction system

Optional Equipments

- Conveyor
- Single-phase system
- Profile minimum cutting equipment
- 180° cutting



							S.		+ I O O == +	The second secon
HP kW		Hz	l (400 V)	øD	ø d			Air Pressure	Air Consumption	l x w x h (mm)
4	3000 r.p.m	50	6,4 A	420 mm	30-32 mm	3,6 mm	2900 r.p.m	6 - 8 bar	38 L / min.	3860 x 1080 x 1460 225 kg

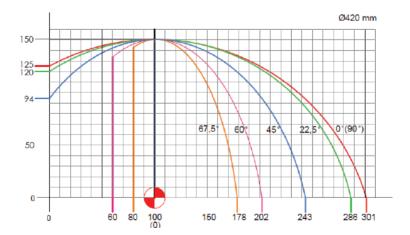

Özçelik Makina continuously improves its products and offers new and modern solutions for PVC and Aluminum Profile Processing. Accordingly, Özçelik reserves the right to change the information in this document without notice. All dimensions and weights are reference values. Valid from January 2023